Lining and pipes

ALUPLAST 930 R/M®



SINTERED ALUMINA ADHESIVE PASTE

Adhesive paste containing 70% ALUDES 150 particles. The best alternative for non-standard forms of equipment lining or those which require repair.

MIX



Adhesive paste


Hardening agent



8h after application

USAGE

ALUPLAST 93R®	A+B 10 kg	Thickness	5 mm
		Surface	1 m² approximately
ALUPLAST 93M®	A+B 25 kg	Thickness	15 mm
		Surface	1 m² approximately

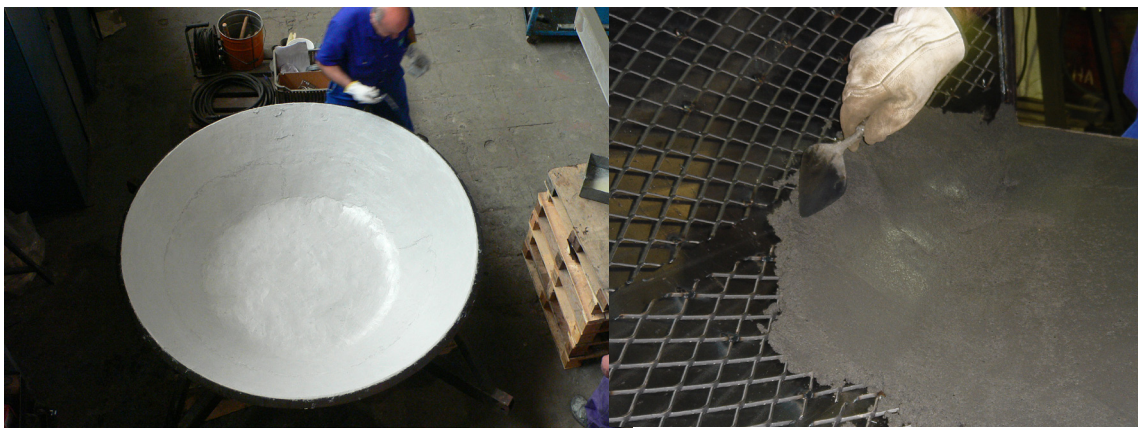

TECNODESGAST®
Anti-wear technology


WWW.TECNODESGAST.COM

ALUPLAST 93 R/M®


Lining and pipe





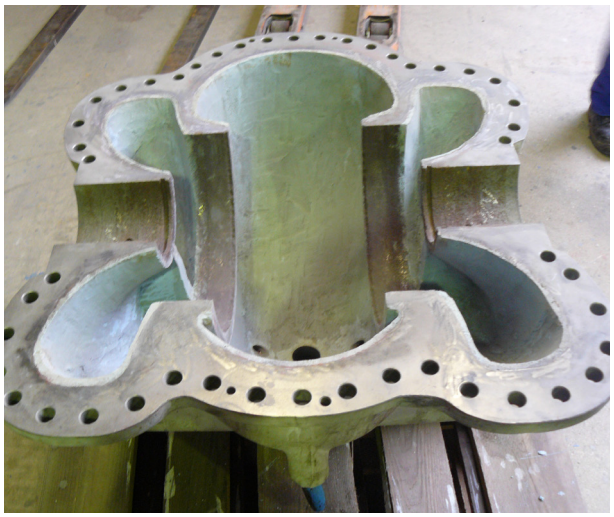



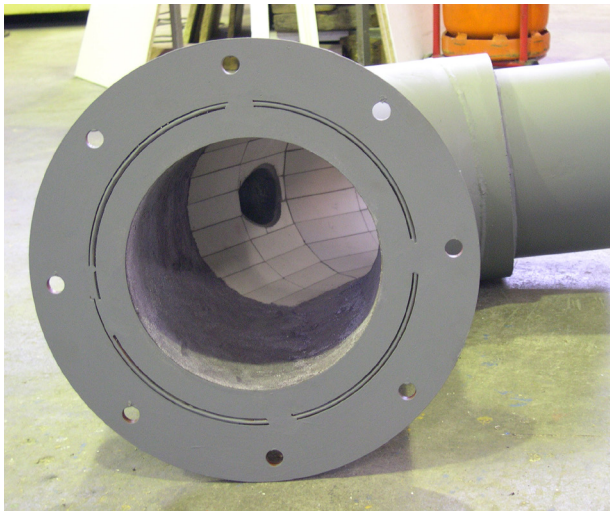



TECNODESGAST®
Anti-wear technology

WWW.TECNODESGAST.COM